



DC600

Features

- Dual Chamber Isobaric Cabinet.
- 600w High Power Handling.
- High efficiency.
- Available in any BS, REL or Pantone® colour
- Strong perforated steel Grill.
- 101 dB sensitivity.
- Very Low distortion.
- Simple Installation and maintenance
- Five-Year Warranty

Applications


- Dance floor Systems
- Foreground Bar systems.
- Theatres and discotheques, Bars, AV.
- Hi-Fi Quality Foreground Music
- Aerobics and Sports Halls
- Theme Bars and Restaurants
- In-fill systems in theatres and Discotheques.
- Distributed AV Presentation
- High Power studio monitoring

Also available TC15

Double the power rating in a twin 15" 1200 watt format



ENCLOSURE TYPE	Dual Chamber Isobaric Cabinet.
FORMAT	Single amped active.
DRIVER COMPLIMENT	Single 15" - 4" Voice coil Woofer
CROSSOVER & CONTROL	via active controller.
DISPERSION	Omni directional
FREQUENCY RESPONSE	40-250Hz
POWER HANDLING	600-Watts Nominal 1200-Watts Continuous Program
SENSITIVITY	101 dB
MAXIMUM SPL	129 dB (peak)
NOMINAL IMPEDANCE	8 ohms
RIGGING & FIXING	Available to order
INPUT CONNECTORS	NL4C Speakon x 2
STANDERD FINISH	Black textured Paint or Raw wood for on site finishing
CUSTOM FINNISH	Available in any BS, RAL or Pantone® colour
DIMENSIONS	Height: 750 mm Width: 600 mm Depth: 600 mm

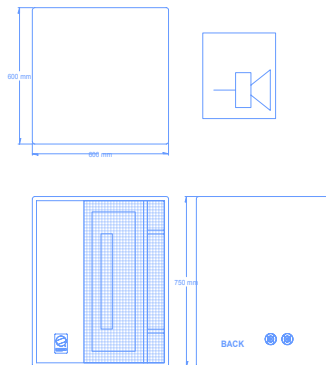

WEIGHT	kg	22 Kg
SHIPPING WIGHT		
SHIPPING DIMENSIONS		